


GSH 350-500

Heavy duty granulators



- Knives are adjusted outside of the machine
- Specially developed deflector wedge
- Wide choice of rotors
- Well thought out housing design
- Strong Welded Steel construction
- Oversized outboard bearings

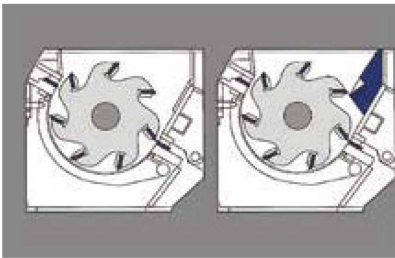

The easily removable deflector wedge acts as a third stator blade and can be used to adjust the aggressiveness of the rotor at the first cutting point.

Applications

The wide range of rotors and hopper styles allow the GSH machines to be tailored to almost every application in the plastic recycling field. The GSH 350 and 500 granulators are mainly used as central granulators for in-house recycling applications to process thick-walled parts in one step or as a second step granulator after a shredder to reach higher throughput rates. For abrasive, contaminated or highly filled materials the machines can be equipped with special wear protections, such as hard facing of the rotor and housing and key parts manufactured from highly wear resistant steels.



The GSH granulators are available with different rotor options to fit different applications. All rotors feature the V-cut technology creating a high quality regrind.

General Description

The heavy duty granulators of the GSH 350 and 500 series offer a wide array of different rotor designs with widths ranging from 500 mm to 1000 mm with a diameter of 350 and 500 mm respectively. The completely welded heavy steel construction is designed to withstand the most demanding and universal applications. Rotor bearings, knife mounts, and rotor shaft are oversized.


The standard V-cut creates a high quality regrind with a very low percentage of fines in the output material. The removable third stator blade is acting as a deflector wedge and allows the machine to be quickly adjusted to different application scenarios. Other standard features include easily replaceable wear plates in the cutting chamber as well as outboard bearings reducing the risk of contamination.



The heavy duty bearings are separated from the cutting chamber to avoid lubricants entering the cutting chamber and bearing failure due to material contamination in the bearings.

GSH 350-500

Heavy Duty Granulator

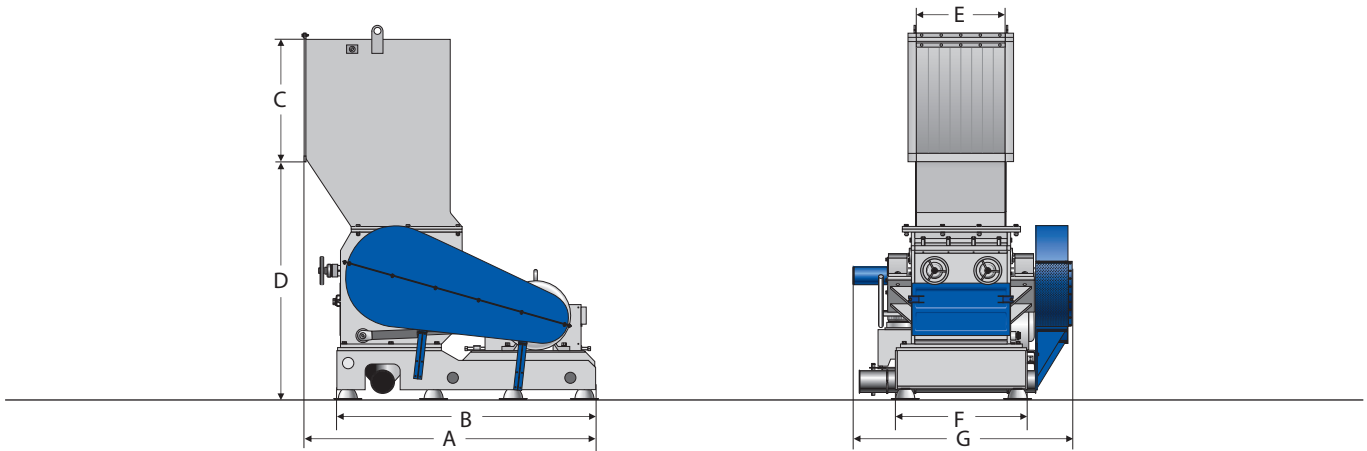

Technical Specifications and Dimensions

Model

Rotor diameter (mm)

350/500

350

500/600

500

500/1000

500

Rotor width (mm)

500

600

1000

Drive capacity (kW)

22

55

75

Rotor knife (rows)

3 or 5

3 or 5

3 or 5

Stator blade (rows)

2 or 3

2 or 3

2 or 3

Screen size (mm)

>6

>6

>6

Effective working area (mm)

460 x 516

636 x 590

985 x 590

Weight approx (kg)

1800

3100

4200

A (mm)

1820

2130

2320

B (mm)

1620

2020

2220

C (mm)

740

800

900

D (mm)

1610

1765

1870

E (mm)

515

635

985

F (mm)

775

1090

1540

G (mm)

1290

1570

1915

ZERMA AMERICA

9120 Centerlinks Commerce Dr., Unit 4

Fort Myers, FL 33912

239-219-1100

www.zerma-america.com

sales@zerma-america.com

Technical modifications reserved / ver1.8 - 02.2018 / en

zerma-america.com

