ZIS

Shredder For Voluminous Parts

- 35% more internal volume compared to the ZSS series
- Internal hydraulic pusher (ram)
- Variable speed, faster pusher movement
- Smaller footprint compared to traditional horizontal pusher style shredders
- enclosed cutting chamber to avoid material spillage
- All advantages of the conventional ZSS series



The shredders use concave, ground, square knives producing high quality output. The cutters can be turned after a side is worn out.



All ZERMA shredders are equipped with a large diameter flat rotor. The knives are fixed in special knife holders fitted in machined pockets. Optional weld on hard facing is available for abrasive applications.



The internal ram design on the ZIS series allows the cutting chamber volume to be increased while keeping a small footprint. The ZIS is ideal for shredding of big volume parts.

General Description

The ZIS series shredders are single shaft shredders with a large internal volume. The redesigned hydraulic pusher system creates approx 35% more space in the cutting chamber while increasing the power and speed of the ram itself. The machines are equipped with a 457 mm diameter ZERMA E rotor with widths ranging from 1200mm to 2000 mm. As on the ZSS machines, the rotor is driven via an oversized gearbox. The completely enclosed welded steel housing increases the stability and avoids material spillage. The ZIS incorporates all the traditional advantages of the ZERMA knife and knife holder design as well as standard features such as outboard bearings, hydraulic screen cradle, easy maintainability and advanced controls.


Applications

The ZIS shredders have been designed to handle voluminous parts such as IBCs, wheelie bins, pallets, large drums, etc., but also retain the versatility and flexibility to be used for general recycling in the plastic and wood industry. As with all ZERMA shredders, the ZIS range can be equipped with a wear package for the processing of highly abrasive, filled materials.



ZIS

Shredder For Voluminous Parts

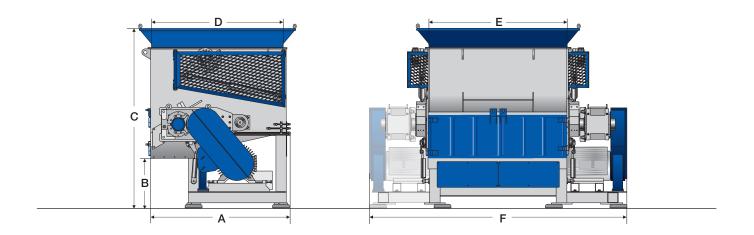

Technical Specifications and Dimensions

ΝЛ	_	А	_	ı
IAI	U	ч	C	ı

Rotor diameter (mm)

Rotor width (mm)

Rotor speed (rpm)

Drive capacity (kW)

Rotor knife (pcs)

Stator blades (rows)

Ram feeder drive (kW)

Screen size (mm)

Cutting chamber volume (m³)

Effective working area (mm)

Weight approx (kg)

A (mm)

B (mm)

C (mm)

D (mm)

E (mm)

F (mm)

1200		

457 1130

74 55

54/81 1

> 5.6 >40 2.15

1400 x 1010 5000

2070 725 2600

2320

2600 1880 1140 **1500** 457

1410 74 75

75 68/102 1

5.6 >40 2.7

1400 x 1290 6400

2070 725 2600

1880 1420 2635 **2000** 457

96/144 1 5.6

>40 3.75

1400 x 1850 8800

1980 3710

ZERMA

311 Era Drive

Northbrook, IL 60062 Phone: 1-847-291-1300 sales@zerma-america.com

